

TSM-PC05A.08 TSM-PA05A.08

THE **Honey** MODULE

by **Trina**solar

15.9%
MAX EFFICIENCY

260W
MAX POWER OUTPUT

10 YEAR
PRODUCT WARRANTY

25 YEAR
LINEAR POWER WARRANTY


Founded in 1997, Trina Solar is a vertically integrated PV manufacturer, involved in the production of ingots, wafers and cells to the assembly of high quality modules, using both mono and multicrystalline technologies. As of July 2011, the Company has already achieved an annualized nameplate module capacity of approximately 1.9GW. Trina Solar's wide range of products are used in residential, commercial, industrial and public utility applications throughout the world.

Only by matching an efficient cost-structure with proven performance will we as an industry achieve grid parity. And at Trina Solar, we have both.

Trina Solar Limited
www.trinasolar.com



Module can bear snow loads up to **5400Pa** and wind loads up to **2400Pa**



Guaranteed power output **0~+3%**



High performance under low light conditions
Cloudy days, mornings and evenings




Independently certified by **international certification bodies**



Manufactured according to International Quality and Environment Management System Standards **ISO9001, ISO14001**

LINEAR PERFORMANCE WARRANTY


10 Year Product Warranty • 25 Year Linear Power Warranty

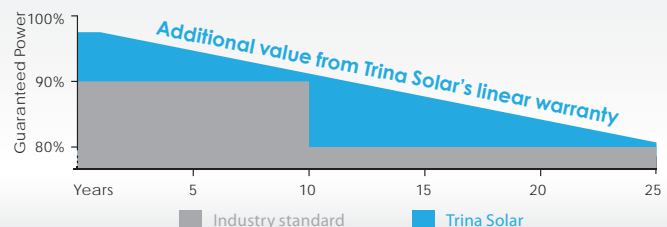


NEW

TSM-PC05A.08 / TSM-PA05A.08 THE MODULE

DIMENSIONS OF PV MODULE TSM-PC/PA 05A.08

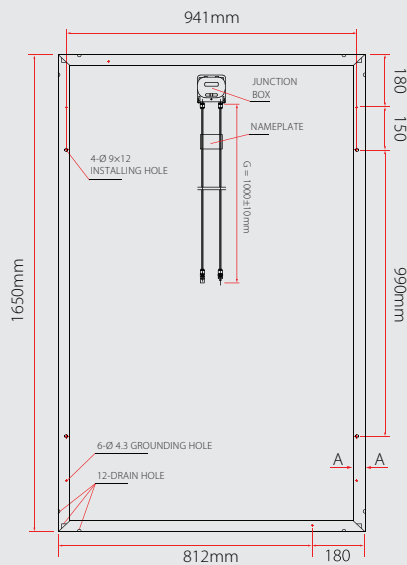


Back View



A-A

I-V CURVES OF PV MODULE TSM-250 PC/PA 05A.08

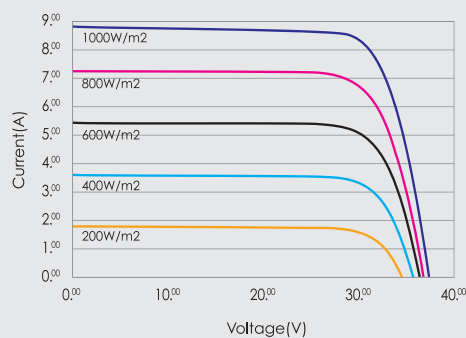

Average efficiency reduction of 4.5% at 200W/m² according to EN 60904-1.

CERTIFICATION



ELECTRICAL DATA @ STC	TSM-245 PC/PA05A.08	TSM-250 PC/PA05A.08	TSM-255 PC/PA05A.08	TSM-260 PC/PA05A.08
Peak Power Watts-P _{MAX} (Wp)	245	250	255	260
Power Output Tolerance-P _{MAX} (%)	0/+3	0/+3	0/+3	0/+3
Maximum Power Voltage-V _{MP} (V)	30.2	30.5	30.9	31.3
Maximum Power Current-I _{MPP} (A)	8.12	8.20	8.26	8.31
Open Circuit Voltage-V _{OC} (V)	37.7	37.8	38.0	38.2
Short Circuit Current-I _{SC} (A)	8.83	8.90	8.95	9.02
Module Efficiency η _m (%)	15.0	15.3	15.6	15.9

Values at Standard Test Conditions STC (Air Mass AM1.5, Irradiance 1000W/m², Cell Temperature 25°C).

ELECTRICAL DATA @ NOCT	TSM-245 PC/PA05A.08	TSM-250 PC/PA05A.08	TSM-255 PC/PA05A.08	TSM-260 PC/PA05A.08
Maximum Power (W)	180	183	187	191
Maximum Power Voltage (V)	27.4	27.7	28.0	28.2
Maximum Power Current (A)	6.56	6.62	6.68	6.76
Open Circuit Voltage (V)	34.6	34.8	34.9	35.1
Short Circuit Current (A)	7.14	7.20	7.24	7.30

NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1M/s.

MECHANICAL DATA

Solar cells	Multicrystalline 156 × 156mm (6 inches)
Cell orientation	60 cells (6 × 10)
Module dimension	1650 × 992 × 40mm (64.95 × 39.05 × 1.57 inches)
Weight	19.5kg (43.0 lb)
Glass	High transparency solar glass 3.2mm (0.13 inches)
Frame	Anodized aluminium alloy
J-Box	IP 65 rated
Cables / Connector	Photovoltaic Technology cable 4.0mm ² (0.006 inches ²), 1000mm (39.4 inches), MC4

TEMPERATURE RATINGS

Nominal Operating Cell Temperature (NOCT)	46°C (±2°C)
Temperature Coefficient of P _{MAX}	-0.41%/°C
Temperature Coefficient of V _{OC}	-0.32%/°C
Temperature Coefficient of I _{SC}	0.053%/°C

MAXIMUM RATINGS

Operational Temperature	-40~+85°C
Maximum System Voltage	1000V DC(IEC)/600V DC(UL)
Max Series Fuse Rating	15A

WARRANTY

- 10 year workmanship warranty
 - 25 year linear performance warranty
- (Please refer to product warranty for details)

PACKAGING CONFIGURATION

- Modules per box: 24 pcs
- Modules per 40' container: 672 pcs